

Three Phase
2MPPTs

BSM30K-B

Commercial Medium Power Inverter

30KW



BLUESUNPV

www.bluesunpv.com / f in FOLLOW US @Bluesun Solar



20% Max DC Overload



200Vdc low starting voltage
higher yield




High precision & intelligent
string detection
Compatible with
182/210 PV panels



AC&DC type II SPD



Compact structure,
easy for installation
and maintenance

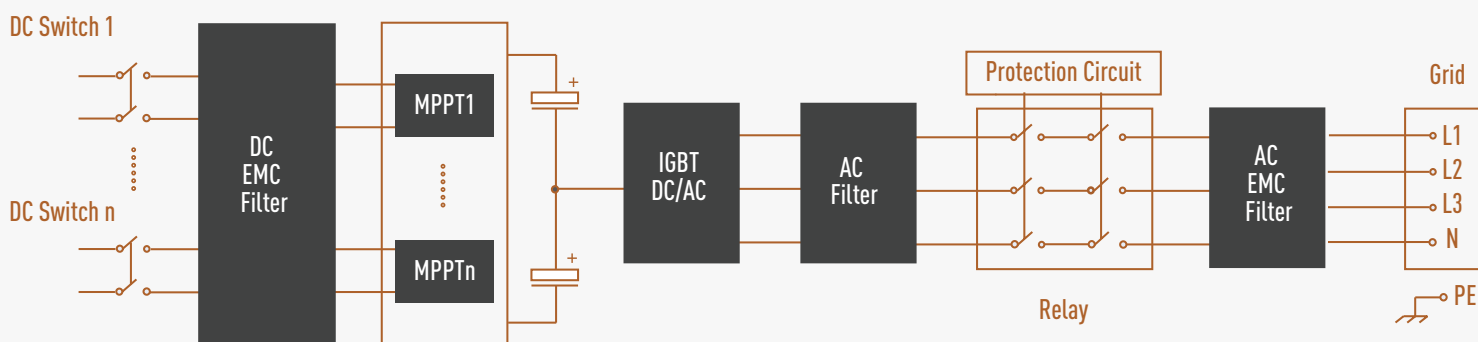

Technical Parameters

Model		BSM30K-B
DC Input	Max. DC Voltage	1100V
	Starting Voltage	200V
	MPPT Voltage Range	200V~1000V
	MPPT Range Full Load	425V~850V
	Max. Input Current of Each MPPT	40A /40A
	Max. short-circuit current	60A /60A
	Number of DC Inputs	3 /3
	MPPT Number	2
AC Output	Rated Output Power	30kW
	Max. Active Power (cos θ =1)	33kW
	Rated Output Voltage	400V(Three Phase)
	Operating Voltage Range	300V~520V
	Rated Output Current	43.5A
	Max. Output Current	47.6A
	Rated Grid Frequency	50Hz / 60Hz
	Power Factor	0.8 (Leading) ~ 0.8 (Lagging)
	THD	<3%
System Parameters	Max.Efficiency	99.00%
	European Efficiency	98.80%
	AC/DC SPD	Support
	Insulation Impedance Detection	Support
	Residual Leakage Current Detection	Support
	PV String Fault Detection	Support
	Output Overcurrent Protection	Support
	Protection Degree	IP65
	Operating Temperature Range	-40℃ ~ +60℃
	Cooling System	Smart Air Cooling
	Standby Power Consumption	<1W
	Topology Structure	Transformerless
	Operating Altitude	5000m (Derating above 3000m)
	Display	LED Indicator + APP
	Communication	WiFi / GPRS / 4G
	Certification	CE, IEC62109, VDE0126-1-1, VDE-AR-N4105, CEI 0-21, IEC62116&IEC61727, EN50438, EN50549
Mechanical Parameters	Dimensions (W*H*D)	380*450*247mm
	Weight	35kg

BLUESUN SOLAR CO.,LTD

Tel: +86 (158) 5821 3997
Fax: +86 (551) 4565 2651
E-mail: info@bluesunpv.com
Add: 1499 Zhenxing Road, Shushan District, 230031 Hefei, China

*Release BSMXXK-B-2022-03-Rev01-EN